
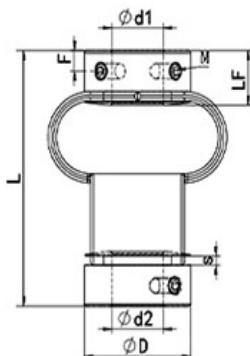


超級聯軸器 CHF couplings

- Metal hubs et polumer element
- High misalignments allowed
- Electrical shaft insulation

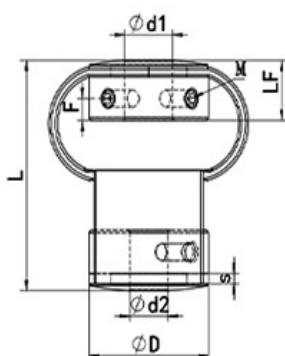

產品型號	常用d1/d2內徑尺寸	L	D	d	d1	d1	LF	M
CHF 15x24	3-4-5-6-6.35-7-8	24	15	6	3	8	8	M3
CHF 15x31	3-4-5-6-6.35-7-8	31	15	6	3	8	8	M3
CHF 18x28	4-5-6-6.35-7-8-9-10	28	18	6	4	10	9	M4
CHF 18x38	4-5-6-6.35-7-8-9-10	38	18	6	4	10	9	M4
CHF 25x45	6-6.35-7-8-9-10-12-14-15	45	25	8	6	15	13.4	M4
CHF 25x55	6-6.35-7-8-9-10-12-14-15	55	25	10	6	15	13.4	M4

SPECIFICATIONS

Series	Bore diameter d-d1 (mm)	Max. torque (Nm)	Max. Rotational freq. (rpm)	Moment of inertia (gcm ²)	Static torsional Stiffness (Nm/rad)	Max error of eccentricity (mm)	Max error of angularity (°)	Max error of shaft-end-play (mm)	Mass (g)
CHF 15x24	6-8	0,5	8000	10	15	±2,5	±2-5	±4,5	20
CHF 15x31	6-8	0,5	8000	10	15	±2,5	±2-5	±4,5	20
CHF 18x28	4-10	0,8	6000	10	20	±2,5	±2-5	±4,5	20
CHF 18x38	4-10	0,8	6000	10	20	±2,5	±2-5	±4,5	20
CHF 25x45	4-15	1	5000	10	25	±2,5	±2-5	±4,5	20
CHF 25x55	4-15	1	5000	10	25	±2,5	±2-5	±4,5	20



HUI-JING ELECTRON CO.,LTD

peter@huijing.com.tw

TEL: + 886-4-26999859 FAX: +886-4-26997006

<http://www.hui-jing.com.tw>